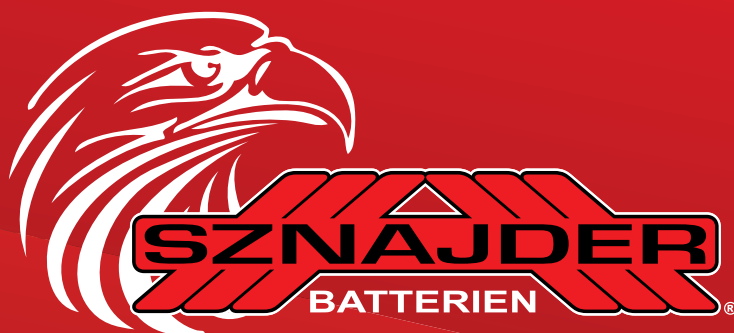


**THE POWER COMPANY**

[www.sznajder.eu](http://www.sznajder.eu)


















# Technologia AGM

Absorbent Glass Mat



**AGM**



CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
560 02	60	630				L2	1	0	B13
570 02	70	760				L3	1	0	B13
580 02	80	800				L4	1	0	B13
595 02	95	850				L5	1	0	B13
605 02	105	950				L6	1	0	B13



# Technologia AGM

Absorbent Glass Mat



## AGM SPECIAL



CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
620 02	C5 <b>100</b>	<b>1000</b>				D7	1	2	B00
640 02	<b>140</b>	<b>800</b>				D4	1	3	B00
680 02	<b>180</b>	<b>1000</b>				D5	1	3	B00
720 02	<b>220</b>	<b>1200</b>				D6	1	3	B00



# Technologia EFB

## Enhanced Flooded Battery






# EFB Premium










































CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
550 04	50	500				L1	1	0	B13
552 04	50	500				LB1	1	0	B13
560 04	60	600				LB2	1	0	B13
562 04	62	600				L2	1	0	B13
575 04	75	780				LB3	1	0	B13
578 04	77	800				L3	1	0	B13
582 04	82	820				LB4	1	0	B13
















**EFB Premium**

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
600 04	100	900				L5	1	0	B13



CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
550 05	50	460				L1	1	0	B13
550 08	50	460				LB1	1	0	B13
560 08	60	560				LB2	1	0	B13
562 05	62	560				L2	1	0	B13
565 46 ASIAN	65	620				D23	1	0	B00

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
550 05	50	460				L1	1	0	B13
550 08	50	460				LB1	1	0	B13
560 08	60	560				LB2	1	0	B13
562 05	62	560				L2	1	0	B13
565 46 ASIAN	65	620				D23	1	0	B00
570 46 ASIAN	70	630				D26	1	0	B00
575 08	75	750				LB3	1	0	B13
577 05	77	750				L3	1	0	B13
580 08	80	750				LB4	1	0	B13

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
585 05	85	750				L4	1	0	B13
600 05	100	800				L5	1	0	B13
600 46 ASIAN	100	800				D31	1	0	B01
600 47 ASIAN	100	800				D31	1	1	B01
610 05	110	920				L6	1	0	B13



# Technologia EFB Enhanced Flooded Battery



## Carbon SVR



CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
640 05	140	900				D4	1	3	B00
680 05	180	1100				D5	1	3	B00
725 05	225	1200				D6	1	3	B00
































CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
544 45	44	450				LB1	1	0	B13
545 70 ASIAN	45	360				B24	3+A	0	B00
545 72 ASIAN	45	360				B24	3+A	1	B00
552 45	52	500				LB1	1	0	B13
554 35	54	500				L1	1	0	B13
564 45	64	620				LB2	1	0	B13
575 50 ASIAN	75	700				D26	1	0	B05




























CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20(Ah)	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
575 52 ASIAN	75	700				D26	1	1	B05
578 45	78	750				LB3	1	0	B13
580 35	80	760				L3	1	0	B13
585 45	85	800				LB4	1	0	B13
590 45	90	800				LB5	1	0	B13
595 50 ASIAN	95	760				D31	1	0	B01
595 52 ASIAN	95	760				D31	1	1	B01
600 35	100	900				L5	1	0	B13




























**We have been producing batteries  
since 1925**















CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA(EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
540 77 ASIAN	40	300				B19	3	0	BA01
540 79 ASIAN	40	300				B19	3	1	BA01
543 08	43	340				L0	1	0	B03
545 23 ASIAN	45	340				B24	3+A	0	B00
545 24 ASIAN	45	340				B24	3+A	1	B00
545 58	45	370				LB1	1	0	B13
545 59	45	360				L1	1	0	B13

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20/Ah	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
545 65	45	360				L1	1	1	B13
545 77 ASIAN	45	340				E2	1	0	B01
545 79 ASIAN	45	340				E2	1	1	B03
550 58	50	420				LB1	1	0	B13
550 59	50	420				L1	1	0	B13
555 59	55	460				L2	1	0	B13
555 65	55	460				L2	1	1	B13
560 23 ASIAN	60	480				D23	1	0	B01
560 51 NEW	60	620				LB2	1	0	B13

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20(Ah)	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
560 68 ASIAN	60	480				D23	1	0	B00
560 69 ASIAN	60	480				D23	1	1	B00
562 51 NEW	62	600				L2	1	0	B13
562 58	62	520				LB2	1	0	B13
562 59	62	520				L2	1	0	B13
562 65	62	520				L2	1	1	B13
570 24 ASIAN	70	540				D26	1	1	B05
570 29 ASIAN	70	540				D26	1	0	B05
570 38	70	600				L3	1	0	B13

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20/Ah	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
570 58	<b>70</b>	<b>640</b>				LB3	1	0	B13
572 58	<b>72</b>	<b>680</b>				LB3	1	0	B13
574 12	<b>74</b>	<b>680</b>				L3	1	0	B13
574 14	<b>74</b>	<b>680</b>				L3	1	1	B13
580 14	<b>80</b>	<b>700</b>				LB4	1	0	B13
585 42	<b>85</b>	<b>700</b>				L4	1	0	B13
585 65	<b>85</b>	<b>700</b>				L4	1	1	B13
588 27	<b>88</b>	<b>680</b>				L5	1	0	B13
592 18	<b>92</b>	<b>720</b>				L5	1	0	B13

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c20/Ah	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
600 32 ASIAN	100	720				D31	1	0	B01
600 33 ASIAN	100	720				D31	1	1	B01
600 38	100	760				L5	1	0	B13
600 65	100	760				L5	1	1	B13



We have been producing  
batteries  
since 1925






# Technologia Ca/Ca HEAVY DUTY


















## Truck PRO


















CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c20Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
610 11 HEAVY DUTY	110	870				D2	1	0	B01
620 11 HEAVY DUTY	120	950				D2	1	0	B01
620 12 HEAVY DUTY	120	950				D2	1	1	B01
635 44 HEAVY DUTY	135	900				MAC	1	3	B03
670 18 HEAVY DUTY	170	950				D5	1	3	B00
680 13 HEAVY DUTY	180	1050				D5	1	3	B00
680 33 HEAVY DUTY	180	1050				D5	1	3	B13

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
700 13 <i>HEAVY DUTY</i>	200	1100				D5	1	3	B00



CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c20 Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
610 14 <i>HEAVY DUTY</i>	110	750				D2	1	0	B01
625 13 <i>HEAVY DUTY</i>	125	750				D4	1	3	B00
625 27 <i>HEAVY DUTY</i>	125	750				D4	1	4	B03
640 20 <i>HEAVY DUTY</i>	140	850				D4	1	3	B00
670 19 <i>HEAVY DUTY</i>	170	950				D5	1	3	B00

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY C20Ah	CCA (EN)	DIMENSIONS (mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
680 14 HEAVY DUTY	180	1050				D5	1	3	B00
680 89 HEAVY DUTY	180	1050				D5	1	4	B13
700 14 HEAVY DUTY	200	1200				D5	1	3	B00
710 27 SUPER HEAVY DUTY	210	1150				D6	1	3	B00
730 11 SUPER HEAVY DUTY	230	1200				D6	1	3	B00











*Special*















CATALOGUE CODE	PARAMETERS			TECHNICAL SPECIFICATIONS						
	CAPACITY C20 Ah	CCA(EN)	VOLTAGE	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
080 01	80	600	6				M2	1	0	B00
107 00 HEAVY DUTY	70	600	24				SEL	6	4	B00
118 00 HEAVY DUTY	180	1000	12				SPK	6	4	B03
112 84 HEAVY DUTY	112	720	6				M4	1	0	B01
140 84 HEAVY DUTY	140	900	6				M4	1	0	B01
165 68 HEAVY DUTY	165	900	6				M5	1	0	B00
200 56 HEAVY DUTY	200	1150	6				M6	1	0	B00







CATALOGUE CODE	PARAMETERS			TECHNICAL SPECIFICATIONS						
	CAPACITY C20Ah	CCA(EN)	VOLTAGE	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
200 58 HEAVY DUTY	200	1150	6				M6	RA	0	B00
215 56 HEAVY DUTY	215	1100	6				M6	1	0	B00
260 56 HEAVY DUTY	260	1300	6				M6	1	0	B00
610 23 HEAVY DUTY	110	900	12				D7	1	2	B00
625 23 HEAVY DUTY	125	1000	12				D7	1	2	B00
645 39 HEAVY DUTY	145	900	12				F21	1	0	B00
665 67 HEAVY DUTY	165	850	12				D67	1	0	B00












CATALOGUE CODE	PARAMETERS			TECHNICAL SPECIFICATIONS						
	CAPACITY C20Ah	CCA(EN)	VOLTAGE	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
165 17 HEAVY DUTY	165	900	6				H1	1	0	B01
195 17 HEAVY DUTY	195	1100	6				H1	1	0	B01



CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c5Ah/c20Ah/c100Ah	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
956 07	50/60/70	460				L2	1	0	B13
958 07	60/80/90	600				L3	1	0	B13
960 07	75/100/110	720				L5	1	0	B13
961 07	82/110/120	680				D2	1	0	B01

CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c5Ah/c20Ah/c100Ah	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
964 07	115/140/150	640				D4	1	3	B00
968 07	145/180/190	1000				D5	1	3	B00



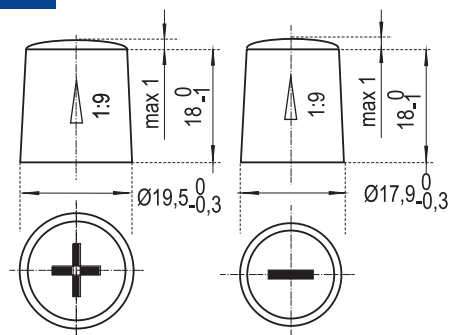
CATALOGUE CODE	PARAMETERS		TECHNICAL SPECIFICATIONS						
	CAPACITY c5Ah/c20Ah/c100Ah	CCA(EN)	DIMENSIONS(mm)			BOX TYPE	TYPE OF POLES	POLARITY	BASE HOLD-DOWN
857 50	60/75/90	12				L3	1	0	B13
857 51	60/75/90	12				L3	1	1	B13
860 00	75/100/110	12				L5	1	0	B13



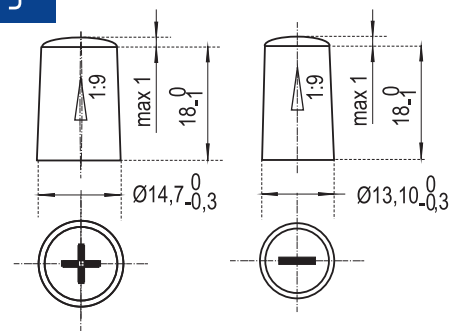


### Bieguny Type of poles

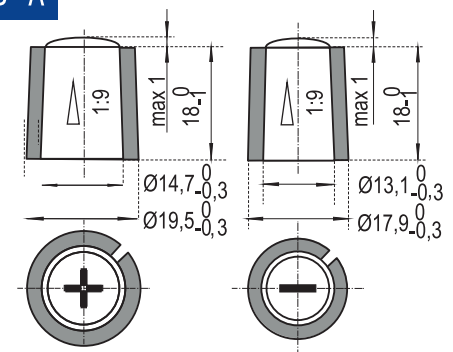
1



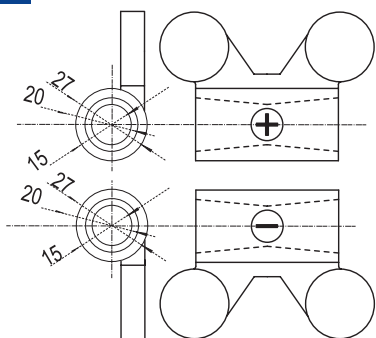
3



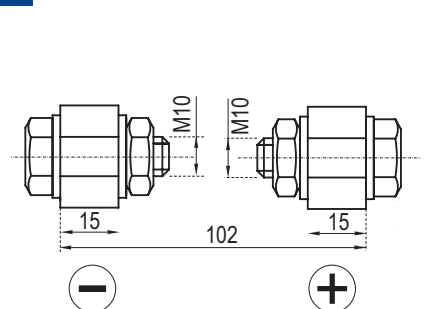
3+A



5




6




### Układ ogniw Polarity


0/6V




0/12V




1/12V




2/12V




3/12V



4/12V

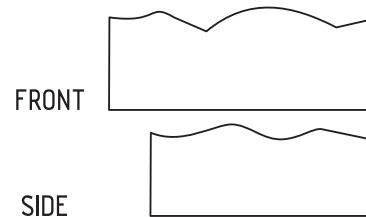


4/24V

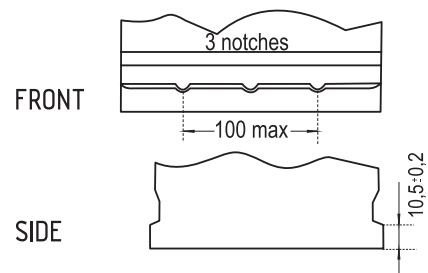


### Typ mocowania Base hold-down

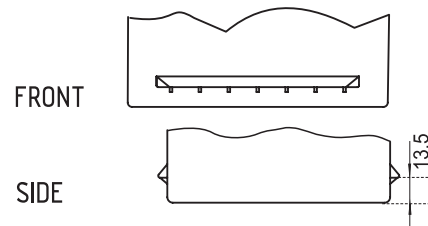
B00



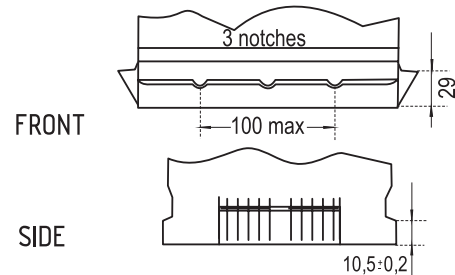
B01



BA1



B05



B13

